



## Data sheet Festplateau2 for Mercedes Sprinter



Mercedes-Benz

Dimensions .....	2
Technical data .....	3
Mandatory equipment base vehicle.....	3
Brakes and suspension.....	3

## Dimensions single cabin

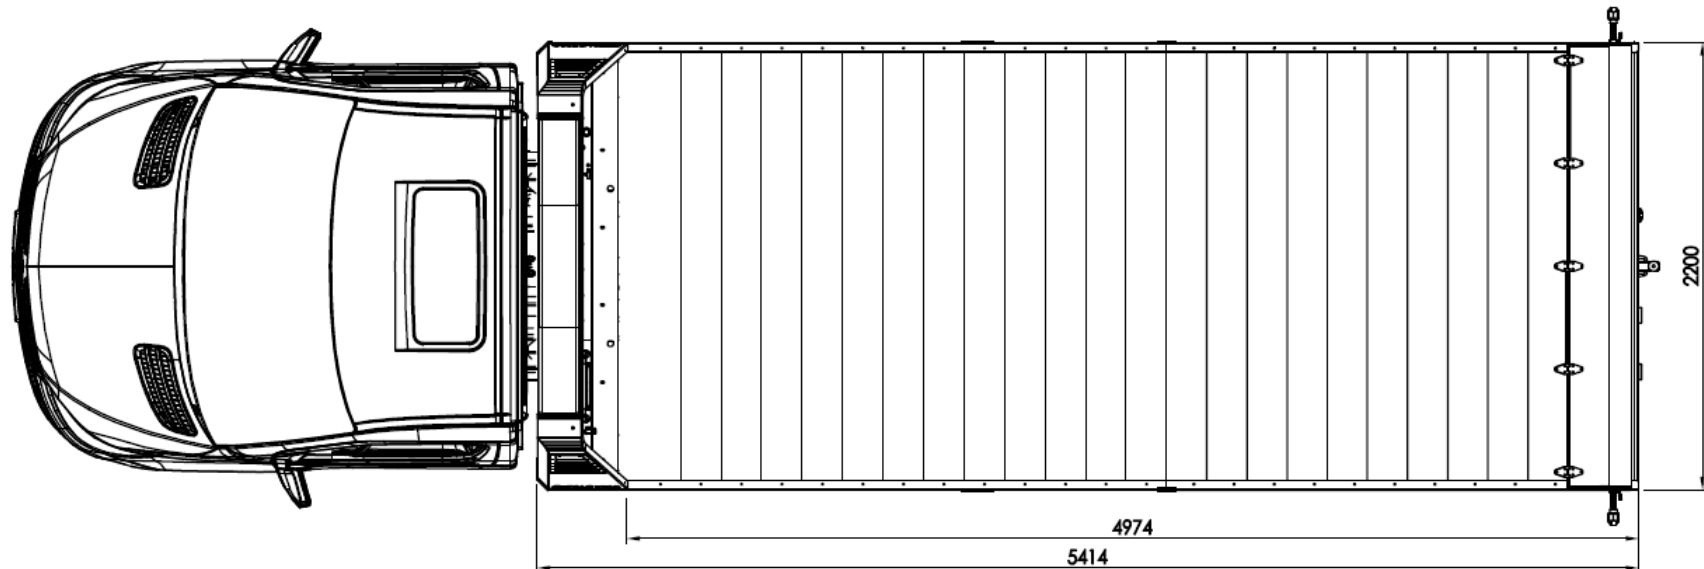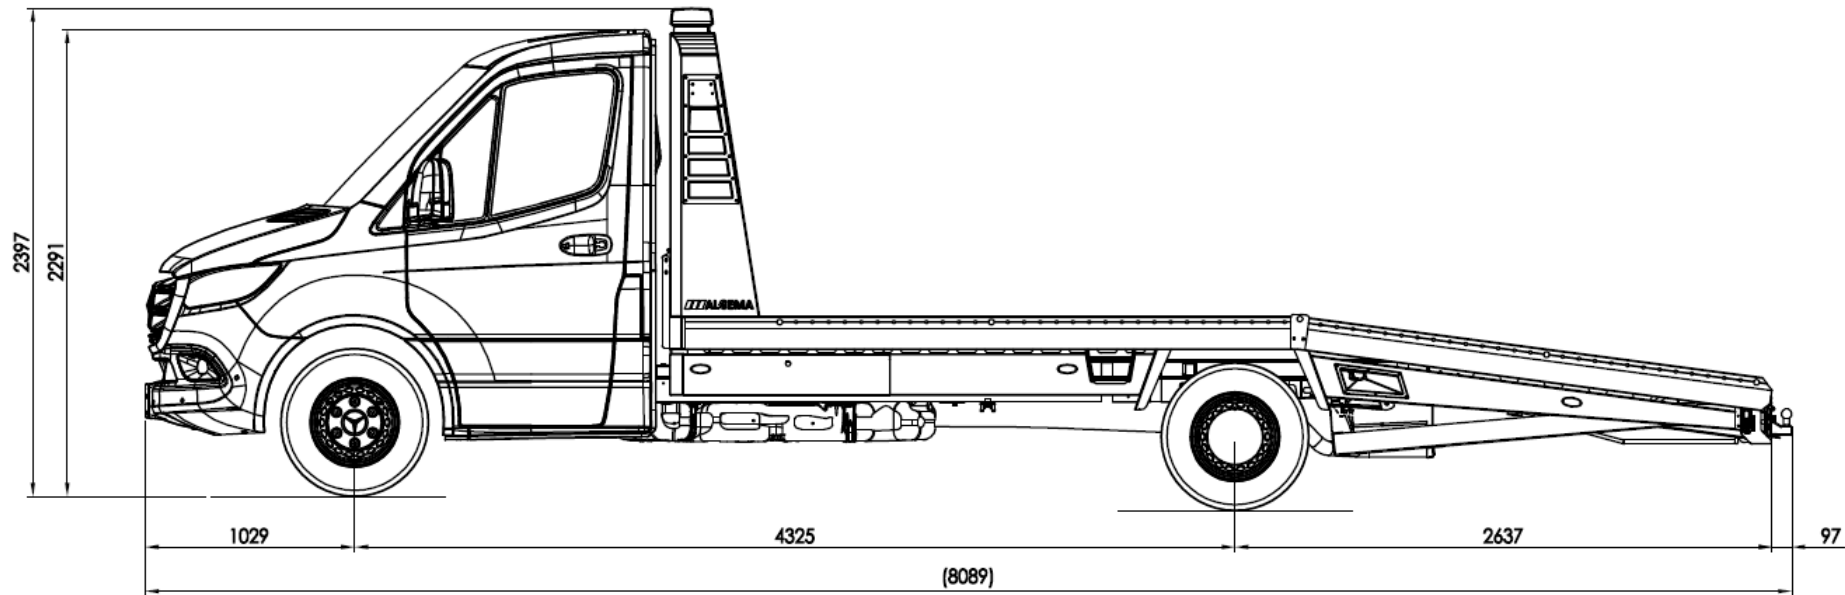

## Specifications base vehicle Sprinter 5,0t

## Modification Festplateau2 (CC558185)

	Cabin	Engine	Emiss. Class	Drive	Gear	Eng.rating [kW (PS)]	Transmission	Axle load 1	Axle load 2	GVW	Unl. Weight	Pay-load	Trailer load	GTW	Tyres	ESP	Comment
A1	Single	511 CDI	EU VI	RWD	Manual	84 (114)	4,727	2.000	3.500	5.000	2.800	2.200	3.500	7.000	205/75 R16C	•	
A2	Single	514 CDI	EU VI	RWD	Manual	105 (143)	4,727	2.000	3.500	5.000	2.800	2.200	3.500	7.000	205/75 R16C	•	
A3	Single	514 CDI	EU VI	RWD	Autom.	105 (143)	4,182	2.000	3.500	5.000	2.820	2.180	3.500	7.000	205/75 R16C	•	
A4	Single	514 CDI	EU VI	RWD	Autom.	105 (143)	4,727	2.000	3.500	5.000	2.820	2.180	3.500	7.000	205/75 R16C	•	
A5	Single	516 CDI	EU VI	RWD	Manual	120 (163)	4,182	2.000	3.500	5.000	2.810	2.190	3.500	7.000	205/75 R16C	•	
A6	Single	516 CDI	EU VI	RWD	Manual	120 (163)	4,727	2.000	3.500	5.000	2.810	2.190	3.500	7.000	205/75 R16C	•	
A7	Single	516 CDI	EU VI	RWD	Autom.	120 (163)	4,182	2.000	3.500	5.000	2.830	2.170	3.500	7.000	205/75 R16C	•	
A8	Single	519 CDI	EU VI	RWD	Autom.	140 (190)	3,923	2.000	3.500	5.000	2.850	2.150	3.500	7.000	205/75 R16C	•	
A9	Single	519 CDI	EU VI	RWD	Autom.	140 (190)	4,182	2.000	3.500	5.000	2.850	2.150	3.500	7.000	205/75 R16C	•	

## Mandatory equipment for single cab:

Code	Description	Comment
Long	Wheel base 4.325 mm	necessary because of construction.
X5G	Variant 5t	
A50	Reinforced front axl	Important because of the highest possible GTW.
CB8	Stabilization stage 2	Increased roll stabilization with increased build-up damping; Standard at Sprinter 5.0t.
CW2	Elimination of vehicle lowering	
EK1	Clamping stripe	
ED4	AGM battery (92Ah)	Standard at Sprinter 5,0t.
M49	Generator 14V; 180A	Standard at Sprinter 5,0t.
E2M	2nd battery in the engine compartment	Because of winch and electrical supply.
FS1	Extended mirror holder	Body width 2190 mm to 2300 mm
QA3	Trailer hitch preparation 3.500kg	
E43	Trailer socket 13-pin	
Y26	2 chocks	Manadatory for N2 vehicles.

## Recommended equipment single cab:

Code	Description	Comment
R87	Spare wheel	Incl. lifting jack and vehicle tool kit
R60	Spare wheel holder provisionally	
F35	Rear window	
F61	Rear view mirror	
SB3	Suspended seat Comfort in cab	
S23	Passengers double seat bank	
RM0	All-season tyres	

## Equipment that may not be ordered with single cab:

Code	Description	Comment

## Suspensions variants:

Airsuspension FP2 MB – FF558191 (Option)
- Conversion from leaf to full air suspension - For low loading height and drive-up angle - VB air suspension - Weight approx. 15 kg